

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 932 318 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

28.07.1999 Bulletin 1999/30

(51) Int. Cl.⁶: H04Q 7/38

(21) Application number: 99101190.9

(22) Date of filing: 22.01.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(72) Inventors:

• De Benedittis, Rosella
20020 Barbaiana di Lainate (MI) (IT)• Betti, Alessandro
62100 Macerata (IT)

(30) Priority: 26.01.1998 IT MI980129

(74) Representative: Giustini, Delio

c/o Italtel S.p.A.,

Cascina Castelletto

20019 Settimo Milanese (MI) (IT)

(71) Applicant: Italtel s.p.a.
20154 Milano (IT)

(54) Method for channel change in digital radiocommunication system

(57) Method for the change of a radio bearer in a digital telecommunication system comprising a radio-mobile unit (PP) and a fixed unit (RFP) connected between them on at least a bearer in the following, labeled with X. When a radio unit (PP or RFP) detects a bad connection quality on bearer X between said radio-mobile unit (PP) and fixed unit (RFP), the method applies with the execution in sequence of the following steps:

- listening of a new frequency on at least one of the time slots used in reception with the purpose to identify a second not interfered bearer, in the following, labelled with Y;
- sending from the requiring radio unit to the interacting radio unit a message requiring the activation of the said second bearer (Y);
- transferring of all communications between both radio units from the first bearer X to the second bearer Y as soon as the requiring radio unit receives a specific confirmation message by the interactive radio unit;
- return to the listening step if the confirmation message is not received.

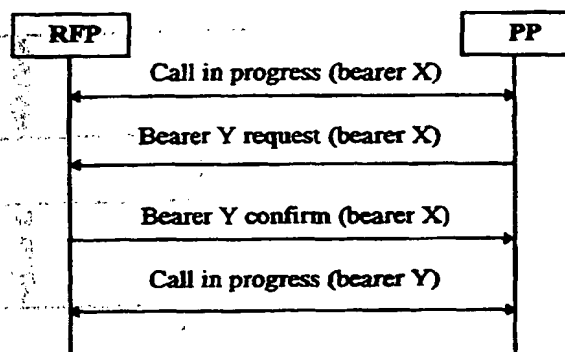


Fig. 5

The invention has the advantage of enabling the handover of a radio bearer changing only the frequency, but maintaining the same transceiving time slots without the need of an additional time slot which, in this way, is available for new communications.

EP 0 932 318 A2

Description

Technical Field

[0001] The present invention relates to the digital telecommunication systems with time division access technique, TDMA (Time Division Multiple Access), and in particular, but not exclusively, systems according to the DECT (Digital Enhanced Cordless Telecommunications) technology.

[0002] More precisely the invention is addressed to the change modalities of the so-called bearer (indicated hereafter with equivalent signification by the term "radio channel") defined by the couple time slot/frequency through which the connection between two transceiver units (one mobile unit PP (Portable Part) and a fixed unit RFP (Radio Fixed Part) occurs.

[0003] As already known, in a DECT system, the transmission and reception of the signals between both radio units, mobile (Portable Part (PP)) and fixed (Radio Fixed Part (RFP)) is arranged in frames. The frame is divided in 2 half frames: normally, the first half frame is used in the fixed to mobile direction (downlink direction), and the second one is used in the mobile to fixed direction (uplink direction). As depicted in Fig. 1, every half frame is subdivided in 12 full type time slots inside of which the rice-transmission of the useful signal occurs according to the TDMA technique. Inside a specific time slot the rice-transmission of a signal uses one of the 10 carriers/radio frequencies allocated into the band (1800 - 1900 MHz) assigned to the DECT systems.

[0004] For connections of the duplex type, used for example, for phone calls, the transmission and the reception channels of a radio unit (the reception and the transmission channels of the other interactive radio unit, respectively) use the same radio carrier and half frame spaced time slots. Fig. 2 shows an example of assignment of time slots for a phone call, (according to DECT terminology, a full duplex bearer).

[0005] In the systems according to the DECT standard, also asymmetric connections are defined, preferably used for data transmission. An asymmetric connection may be set up by one (or more) duplex bearers (i.e. a pair of full slots spaced out by half a frame with an opposite direction and the same radio carrier) and/or simplex bearers (i.e. a pair of full slots spaced out by half a frame with the same transmission direction and the same radio carrier).

[0006] Fig. 3 shows an example of frame occupation by one asymmetric downlink connection based on one double simplex bearer and one duplex bearer.

[0007] As already said the time slot/frequency pair defines the radio bearer, (or radio channel).

[0008] When the quality perceived on the used channel turns out to be deteriorated, changes of the radio bearer on which the connection is established may occur (bearer handover).

[0009] In the DECT systems different mechanisms are

foreseen to check the quality of a communication channel and the transmission quality information obtained may be used by a radio unit to start off a procedure for the change of the bearer (handover) inside the same cell (intracell handover) or towards a new cell (intercell handover).

[0010] In the DECT standard procedures have been defined (i.e. handover) for the change of a radio channel inside a cell or between different cells, if these ones belong to the same cell cluster. The term cluster indicates precisely a unit of cells among which it is possible to carry out the procedure of bearer handover.

[0011] The procedure of bearer handover defines therefore the establishment of a new radio bearer for the replacement of the already established one on which a poor connection quality has been perceived.

Background Art

[0012] EP-A-576 079 discloses a digital telecommunication system in which, during the bearer handover procedure, for a limited period of time, both bearers (the one to be replaced and the new one) coexist and transport the same information.

[0013] The two bearers have to be allocated in different time slots, exception made if the two interacting radio units can use a double transceiver. In fact, when both interactive radio units have a single transceiver, it is necessary that the new requested channel occupy at least a different (from the one in which the old bearer is fitted) and additional time slot (furthermore, possibly a new radio carrier).

[0014] The known procedure presents therefore the drawback that it requires the use of two bearers for the transportation of a unique payload, so rendering not available to the system a bearer that hence cannot be assigned to a user forwarding a connection request during the period of time in which both bearers are active.

Object of the invention

[0015] It is one object of the present invention to overcome the above-mentioned drawbacks and limitations and, in particular, to realise a method for the change of a radio bearer that, respecting the rules of channel allocation imposed by the reference standard, will conserve the same time slot and modify only the radio carrier without requiring the use - even only temporary - of an additional time slot in this way indeed available for new communications.

Summary of the invention

[0016] According to the method proposed by the invention only the frequency of the bearer will be changed but conserving the same transmission and reception time slots.

[0017] This turns out to be, especially advantageous in

those cases where inside the cell (or the cluster) the number of active traffic channels is high (and consequently the number of available time slots is extremely reduced) and in particular when the bearer to be changed occupies two time slots of the full type: in other words it is a double slot.

[0018] The invention achieves these scopes by means of a method having the characteristics exposed in claim 1.

[0019] The features of the present invention which are believed to be novel are set forth with particularity in the appended claims.

Brief description of the drawings

[0020] The invention, together with further objects and advantages thereof, may be understood with reference to the following description, taken in conjunction with the accompanying drawings, and in which:

Fig. 1 (already described) illustrates the structure of the DECT frame;

Fig. 2 (already described) shows an example of time slot occupation for a full duplex connection;

Fig. 3 (already described) shows an example of frame occupation by an asymmetric downlink connection;

Fig. 4 shows a frame occupation example during the procedure of intracell handover of a double slot, as defined by the ETSI standard;

Fig. 5 illustrates a message exchange - according to the invention - for the switching from the duplex bearer X into the duplex bearer Y required by PP. The example reports the case in which the confirmation message of the new bearer will be transported on the old bearer; and

Fig. 6 illustrates a message exchange - according to the invention - on the duplex bearer Z for the switching of the duplex (double simplex) bearer X in the duplex (double simplex) bearer Y, requested by RFP.

Detailed Description of possible Embodiments of the Method the present invention is based on

[0021] As previously indicated, the radio bearer changes may happen when the quality perceived on the used channel is deteriorated. The new chosen bearer must be the less interfered of a filled in table of channels, appropriately updated by the radio unit operating the choice, and it must not belong to the group of bearers or channels judged as interfered (busy channels).

[0022] The list of channels will be splitted in bands of detected power, RSSI (Received Signal Strength Interference), with width less than 6 dB. In particular, the channels with an RSSI measure lower than the minimum value are considered to be "quiet" and may be selected immediately, while the channels with a RSSI

measure higher than a maximum value are considered as "busy" and they cannot be selected. The channels with an RSSI measure within the minimum and the maximum limits are ordered on the basis of the band they belong to.

[0023] When a bad quality of the connection is perceived, the radio unit, on one or both time slots of the bearer in use, (denoted as bearer X) will start listening a new frequency (for example the most distant one from the used one in the assigned band). If the new listened channel, called for convenience bearer Y, is not a "busy channel", and if the channel or the channels less interfered of the previously filled in table cannot be activated (for example due to asynchronicity of radio scanning on the interactive unit) within the following three DECT frames, the radio unit will be authorised to use bearer Y.

[0024] According to an embodiment the listening may happen in time slots where the synchronisation did not take place, an equivalent situation to the missed recognition of the synchronism word defined in the DECT standard.

[0025] The request/negotiation with the interactive radio unit of the new bearer will occur in one of the following ways.

A) DUPLEX TYPE BEARER X

[0026] With reference to Fig. 5 depicting a possible scenario of messages for the switching from the duplex bearer X into the duplex bearer Y, the requiring radio unit sends to the interactive radio unit, on the bearer X and in the own transmission half frame immediately following to the listening/choice of the bearer Y, a message requiring the activation of the bearer Y. The interactive radio unit confirms the use of the new bearer sending on the bearer X, and in the own transmission half frame immediately following the reception of the request message, a specific confirmation message. From this point forward both radio units will communicate on bearer Y instead of bearer X. According to an alternative solution the confirmation message may be sent on the new bearer Y instead of bearer X as specified before.

[0027] If the request is not followed by a confirmation, the requiring radio unit may once again transmit the request of bearer Y on bearer X; if it still does not receive confirmation/response, it will be opportune to scan a new radio bearer (for example a new frequency on the same time slots of the bearer X). If bearer X is belonging to a multibearer connection, the negotiation protocol of the new bearer Y may take place on another bearer of the same connection, which will be called bearer Z, where the connection quality is good.

B) BEARER X OF THE DOUBLE SYMPLEX TYPE

[0028] As remembered before, a double simplex bearer always belongs to a multibearer connection com-

prising at least a duplex bearer. Therefore in this case the negotiation protocol of the new double simplex bearer Y may take place on a duplex bearer, called here for convenience bearer Z, of the same connection. Fig. 6 reports a possible scenario of messages for the switching from the double simplex bearer X into the double simplex bearer Y using the duplex bearer Z where bearers X, Y and Z belong to the same multibearer connection. The example reports the case where the request and confirmation messages of the new double simplex bearer are transported on a duplex bearer of the same connection.

[0029] In order to further optimise the change times of the bearer, the conditions of synchronism loss on bearer X may be used by the requiring radio unit to monitor in the same time slot new frequencies (i.e. the bearers Y).

[0030] Turning back to the more general case, when the radio unit which wants to operate the bearer change has at its disposal two receivers, the listening of a new frequency on the current bearer may take place without interrupting the communication in progress. This makes it possible to substitute the bearer of the seamless type or without data loss.

[0031] In particular, according to the invention, the operation of listening to a new frequency on at least one of the time slots used in reception, with the purpose to identify a second not interfered bearer Y, and to define an interruption of the established communication on said first interfered bearer X, will be preferentially carried out by the one of the two transceiving devices in that inactive time slot.

[0032] The remaining operations such as:

- sending from the requiring radio unit to the interactive radio unit a request message for the activation of said second bearer Y;
- transfer of all other communications between both radio units from said first bearer to said second bearer Y as soon as the requiring radio unit receives a specific confirmation message by the interactive radio unit for the use of the second bearer Y;
- return to the listening step if said confirmation message is not received, are carried out by the other transceiver (in that moment occupied in an other communication on bearer X) with the consequent advantage to carry out the transfer of the communication from the first bearer X to the second bearer Y without an interruption of the communication, or with seamless modality.

[0033] The method according to the invention makes it possible to obtain the following advantages:

- bigger facility in the selection of a new radio bearer;
- smaller waste of the radio resources and therefore minor electromagnetic interference;

• bigger rapidity in the substitution of a radio bearer and therefore reduction of the deterioration time of a communication in progress;

• reduction of the collisions and consequent increase of the capacity of the system according to the invention.

[0034] Although the invention has been described with particular reference to a preferred embodiment, it will be evident to those skilled in the art, that the present invention is not limited thereto, but further variations and modifications may be applied without departing from the scope thereof. It is thus contemplated that the present invention encompasses any and all such embodiments covered by the following claims.

Claims

1. Method for the change of a radio bearer in a digital telecommunication system comprising a radiomobile unit (PP) and a fixed unit (RFP) in connection with each other on at least a radio bearer and when one of said radio units (PP or RFP) detects a bad quality of the connection established on a first radio bearer (X), it starts off a procedure for the change of such first interfered radio bearer (X), characterised in that said method provides for the execution in sequence of the following steps:
 - a) listening of a new frequency on at least one of the time slots used in reception, for the purpose of identifying a second not interfered bearer (Y) and of defining an interruption of the communication established on said first interfered bearer (X);
 - b) sending from the requiring radio unit to the interactive radio unit a message requiring the activation of said second bearer (Y);
 - c) transfer of all other communications between both radio units from said first bearer to said second bearer (Y) as soon as the requiring radio unit receives a specific confirmation message by the interactive radio unit for the use of the second bearer (Y);
 - d) return to the listening step if said confirmation message is not received.
2. Method according to claim 1, characterised in that said request message will be sent on said first bearer (X).
3. Method according to claim 1, characterised in that said request message will be sent on the second bearer (Y).
4. Method according to claim 1, characterised in that said confirmation message will be sent on said first bearer (X).

5. Method according to claim 1, characterised in that said confirmation message will be sent on said second bearer (Y).
6. Method according to the claims from 1 to 5, characterised in that step b) will be repeated at least one time before going over to step d).
7. Method according to the previous claims, characterised in that step b) is preceded by a test that said second bearer (Y) does not belong to a previously filled in table of channels considered to be interfered.
8. Method according to claim 7, characterised in that step b) is preceded by a check that other less interfered channels of said table cannot be activated.
9. Method according to the previous claims, characterised in that, if said first interfered bearer (X) belongs to a multibearer connection and is of the double simplex type, the negotiation protocol of the new bearer Y (step b), c) takes place on at least one of the bearers (Z) of the duplex type of the same connection.
10. Method according to the previous claims, characterised in that said activation request message will be sent on the used bearer (X) and in the own transmission half frame immediately following to the listening/choice of the found bearer (Y).
11. Method according to the previous claims, characterised in that said confirmation message is sent on said first bearer (X) and in the own transmission half frame immediately following the reception of said request message.
12. Method according to the previous claims, characterised in that said listening step occurs in the time slots where the synchronisation did not happen.
13. Method according to the previous claims, characterised in that said radio units (PP-RFP) are provided with a double transceiving device and in that the listening of a new frequency described in the above-mentioned step a) is carried out by the inactive one in that moment of the said two transceiver devices, while the remaining steps b), c), d) are carried out by the other transceiver.




Fig. 1

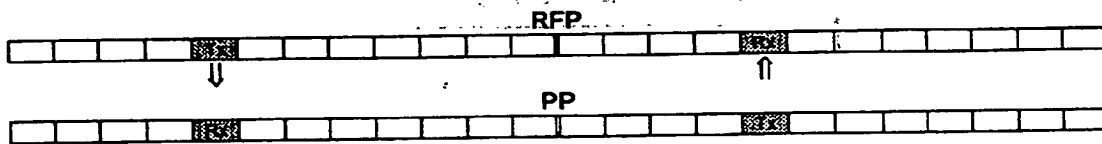


Fig. 2

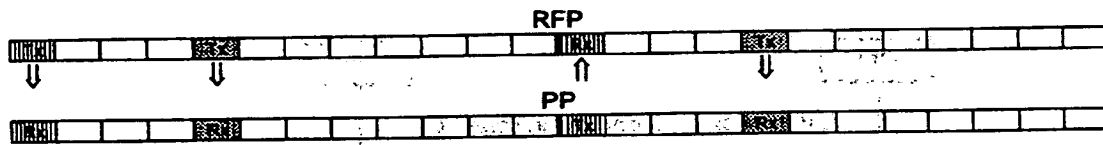


Fig. 3

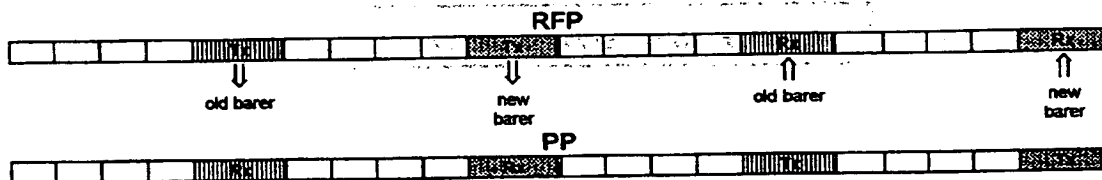


Fig. 4

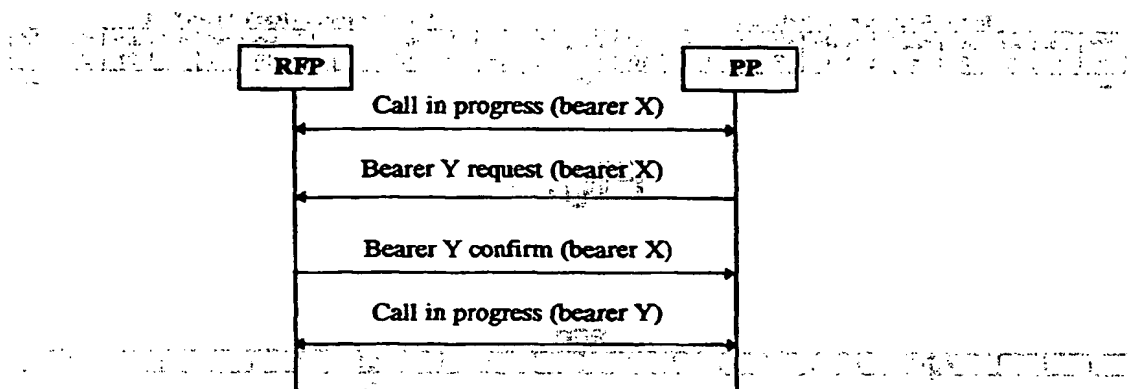


Fig. 5

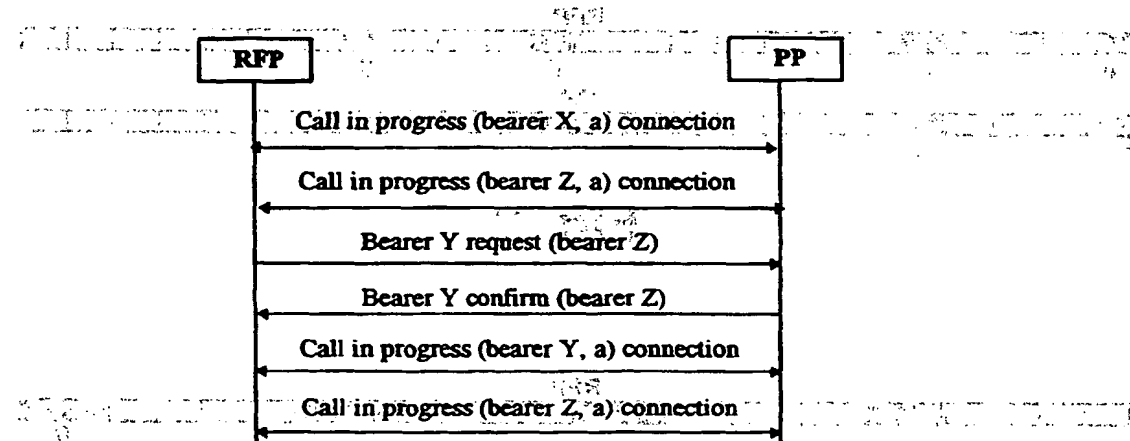


Fig. 6

1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 26

1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 26

...and the fact that the *Journal* is a journal of the American Psychological Association, the largest and most influential organization in the field of psychology, adds to the journal's prestige and makes it a must-read for all psychologists.

1. *Staphylococcus aureus* 2. *Staphylococcus epidermidis* 3. *Staphylococcus saprophyticus* 4. *Staphylococcus sciuri* 5. *Staphylococcus carnosus* 6. *Staphylococcus* sp.

1999 2000

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

100-443887-100

... 1947-1948

100-443887-100

1. DATE _____
 2. TIME _____
 3. LOCATION _____
 4. WITNESSES _____
 5. REPORT _____
 6. REMARKS _____
 7. SIGNATURE _____
 8. INITIALS _____
 9. REMARKS _____
 10. SIGNATURE _____
 11. INITIALS _____
 12. REMARKS _____
 13. SIGNATURE _____
 14. INITIALS _____
 15. REMARKS _____
 16. SIGNATURE _____
 17. INITIALS _____
 18. REMARKS _____
 19. SIGNATURE _____
 20. INITIALS _____
 21. REMARKS _____
 22. SIGNATURE _____
 23. INITIALS _____
 24. REMARKS _____
 25. SIGNATURE _____
 26. INITIALS _____
 27. REMARKS _____
 28. SIGNATURE _____
 29. INITIALS _____
 30. REMARKS _____
 31. SIGNATURE _____
 32. INITIALS _____
 33. REMARKS _____
 34. SIGNATURE _____
 35. INITIALS _____
 36. REMARKS _____
 37. SIGNATURE _____
 38. INITIALS _____
 39. REMARKS _____
 40. SIGNATURE _____
 41. INITIALS _____
 42. REMARKS _____
 43. SIGNATURE _____
 44. INITIALS _____
 45. REMARKS _____
 46. SIGNATURE _____
 47. INITIALS _____
 48. REMARKS _____
 49. SIGNATURE _____
 50. INITIALS _____
 51. REMARKS _____
 52. SIGNATURE _____
 53. INITIALS _____
 54. REMARKS _____
 55. SIGNATURE _____
 56. INITIALS _____
 57. REMARKS _____
 58. SIGNATURE _____
 59. INITIALS _____
 60. REMARKS _____
 61. SIGNATURE _____
 62. INITIALS _____
 63. REMARKS _____
 64. SIGNATURE _____
 65. INITIALS _____
 66. REMARKS _____
 67. SIGNATURE _____
 68. INITIALS _____
 69. REMARKS _____
 70. SIGNATURE _____
 71. INITIALS _____
 72. REMARKS _____
 73. SIGNATURE _____
 74. INITIALS _____
 75. REMARKS _____
 76. SIGNATURE _____
 77. INITIALS _____
 78. REMARKS _____
 79. SIGNATURE _____
 80. INITIALS _____
 81. REMARKS _____
 82. SIGNATURE _____
 83. INITIALS _____
 84. REMARKS _____
 85. SIGNATURE _____
 86. INITIALS _____
 87. REMARKS _____
 88. SIGNATURE _____
 89. INITIALS _____
 90. REMARKS _____
 91. SIGNATURE _____
 92. INITIALS _____
 93. REMARKS _____
 94. SIGNATURE _____
 95. INITIALS _____
 96. REMARKS _____
 97. SIGNATURE _____
 98. INITIALS _____
 99. REMARKS _____
 100. SIGNATURE _____
 101. INITIALS _____
 102. REMARKS _____
 103. SIGNATURE _____
 104. INITIALS _____
 105. REMARKS _____
 106. SIGNATURE _____
 107. INITIALS _____
 108. REMARKS _____
 109. SIGNATURE _____
 110. INITIALS _____
 111. REMARKS _____
 112. SIGNATURE _____
 113. INITIALS _____
 114. REMARKS _____
 115. SIGNATURE _____
 116. INITIALS _____
 117. REMARKS _____
 118. SIGNATURE _____
 119. INITIALS _____
 120. REMARKS _____
 121. SIGNATURE _____
 122. INITIALS _____
 123. REMARKS _____
 124. SIGNATURE _____
 125. INITIALS _____
 126. REMARKS _____
 127. SIGNATURE _____
 128. INITIALS _____
 129. REMARKS _____
 130. SIGNATURE _____
 131. INITIALS _____
 132. REMARKS _____
 133. SIGNATURE _____
 134. INITIALS _____
 135. REMARKS _____
 136. SIGNATURE _____
 137. INITIALS _____
 138. REMARKS _____
 139. SIGNATURE _____
 140. INITIALS _____
 141. REMARKS _____
 142. SIGNATURE _____
 143. INITIALS _____
 144. REMARKS _____
 145. SIGNATURE _____
 146. INITIALS _____
 147. REMARKS _____
 148. SIGNATURE _____
 149. INITIALS _____
 150. REMARKS _____
 151. SIGNATURE _____
 152. INITIALS _____
 153. REMARKS _____
 154. SIGNATURE _____
 155. INITIALS _____
 156. REMARKS _____
 157. SIGNATURE _____
 158. INITIALS _____
 159. REMARKS _____
 160. SIGNATURE _____
 161. INITIALS _____
 162. REMARKS _____
 163. SIGNATURE _____
 164. INITIALS _____
 165. REMARKS _____
 166. SIGNATURE _____
 167. INITIALS _____
 168. REMARKS _____
 169. SIGNATURE _____
 170. INITIALS _____
 171. REMARKS _____
 172. SIGNATURE _____
 173. INITIALS _____
 174. REMARKS _____
 175. SIGNATURE _____
 176. INITIALS _____
 177. REMARKS _____
 178. SIGNATURE _____
 179. INITIALS _____
 180. REMARKS _____
 181. SIGNATURE _____
 182. INITIALS _____
 183. REMARKS _____
 184. SIGNATURE _____
 185. INITIALS _____
 186. REMARKS _____
 187. SIGNATURE _____
 188. INITIALS _____
 189. REMARKS _____
 190. SIGNATURE _____
 191. INITIALS _____
 192. REMARKS _____
 193. SIGNATURE _____
 194. INITIALS _____
 195. REMARKS _____
 196. SIGNATURE _____
 197. INITIALS _____
 198. REMARKS _____
 199. SIGNATURE _____
 200. INITIALS _____
 201. REMARKS _____
 202. SIGNATURE _____
 203. INITIALS _____
 204. REMARKS _____
 205. SIGNATURE _____
 206. INITIALS _____
 207. REMARKS _____
 208. SIGNATURE _____
 209. INITIALS _____
 210. REMARKS _____
 211. SIGNATURE _____
 212. INITIALS _____
 213. REMARKS _____
 214. SIGNATURE _____

[illegible]

the 1990s, the number of people in the United States who are 65 years of age or older is projected to increase from 20 million to 30 million, and the number of people 75 years of age or older is projected to increase from 10 million to 15 million (U.S. Census Bureau, 1997). The number of people 85 years of age or older is projected to increase from 2 million to 4 million (U.S. Census Bureau, 1997). The number of people 90 years of age or older is projected to increase from 500,000 to 1 million (U.S. Census Bureau, 1997). The number of people 95 years of age or older is projected to increase from 100,000 to 200,000 (U.S. Census Bureau, 1997). The number of people 100 years of age or older is projected to increase from 10,000 to 20,000 (U.S. Census Bureau, 1997).

1997-2000

[illegible]

1997-1998, 1998-1999, 1999-2000, 2000-2001, 2001-2002, 2002-2003, 2003-2004, 2004-2005, 2005-2006, 2006-2007, 2007-2008, 2008-2009, 2009-2010, 2010-2011, 2011-2012, 2012-2013, 2013-2014, 2014-2015, 2015-2016, 2016-2017, 2017-2018, 2018-2019, 2019-2020, 2020-2021, 2021-2022, 2022-2023, 2023-2024, 2024-2025, 2025-2026, 2026-2027, 2027-2028, 2028-2029, 2029-2030, 2030-2031, 2031-2032, 2032-2033, 2033-2034, 2034-2035, 2035-2036, 2036-2037, 2037-2038, 2038-2039, 2039-2040, 2040-2041, 2041-2042, 2042-2043, 2043-2044, 2044-2045, 2045-2046, 2046-2047, 2047-2048, 2048-2049, 2049-2050, 2050-2051, 2051-2052, 2052-2053, 2053-2054, 2054-2055, 2055-2056, 2056-2057, 2057-2058, 2058-2059, 2059-2060, 2060-2061, 2061-2062, 2062-2063, 2063-2064, 2064-2065, 2065-2066, 2066-2067, 2067-2068, 2068-2069, 2069-2070, 2070-2071, 2071-2072, 2072-2073, 2073-2074, 2074-2075, 2075-2076, 2076-2077, 2077-2078, 2078-2079, 2079-2080, 2080-2081, 2081-2082, 2082-2083, 2083-2084, 2084-2085, 2085-2086, 2086-2087, 2087-2088, 2088-2089, 2089-2090, 2090-2091, 2091-2092, 2092-2093, 2093-2094, 2094-2095, 2095-2096, 2096-2097, 2097-2098, 2098-2099, 2099-2100, 2100-2101, 2101-2102, 2102-2103, 2103-2104, 2104-2105, 2105-2106, 2106-2107, 2107-2108, 2108-2109, 2109-2110, 2110-2111, 2111-2112, 2112-2113, 2113-2114, 2114-2115, 2115-2116, 2116-2117, 2117-2118, 2118-2119, 2119-2120, 2120-2121, 2121-2122, 2122-2123, 2123-2124, 2124-2125, 2125-2126, 2126-2127, 2127-2128, 2128-2129, 2129-2130, 2130-2131, 2131-2132, 2132-2133, 2133-2134, 2134-2135, 2135-2136, 2136-2137, 2137-2138, 2138-2139, 2139-2140, 2140-2141, 2141-2142, 2142-2143, 2143-2144, 2144-2145, 2145-2146, 2146-2147, 2147-2148, 2148-2149, 2149-2150, 2150-2151, 2151-2152, 2152-2153, 2153-2154, 2154-2155, 2155-2156, 2156-2157, 2157-2158, 2158-2159, 2159-2160, 2160-2161, 2161-2162, 2162-2163, 2163-2164, 2164-2165, 2165-2166, 2166-2167, 2167-2168, 2168-2169, 2169-2170, 2170-2171, 2171-2172, 2172-2173, 2173-2174, 2174-2175, 2175-2176, 2176-2177, 2177-2178, 2178-2179, 2179-2180, 2180-2181, 2181-2182, 2182-2183, 2183-2184, 2184-2185, 2185-2186, 2186-2187, 2187-2188, 2188-2189, 2189-2190, 2190-2191, 2191-2192, 2192-2193, 2193-2194, 2194-2195, 2195-2196, 2196-2197, 2197-2198, 2198-2199, 2199-2200, 2200-2201, 2201-2202, 2202-2203, 2203-2204, 2204-2205, 2205-2206, 2206-2207, 2207-2208, 2208-2209, 2209-2210, 2210-2211, 2211-2212, 2212-2213, 2213-2214, 2214-2215, 2215-2216, 2216-2217, 2217-2218, 2218-2219, 2219-2220, 2220-2221, 2221-2222, 2222-2223, 2223-2224, 2224-2225, 2225-2226, 2226-2227, 2227-2228, 2228-2229, 2229-2230, 2230-2231, 2231-2232, 2232-2233, 2233-2234, 2234-2235, 2235-2236, 2236-2237, 2237-2238, 2238-2239, 2239-2240, 2240-2241, 2241-2242, 2242-2243, 2243-2244, 2244-2245, 2245-2246, 2246-2247, 2247-2248, 2248-2249, 2249-2250, 2250-2251, 2251-2252, 2252-2253, 2253-2254, 2254-2255, 2255-2256, 2256-2257, 2257-2258, 2258-2259, 2259-2260, 2260-2261, 2261-2262, 2262-2263, 2263-2264, 2264-2265, 2265-2266, 2266-2267, 2267-2268, 2268-2269, 2269-2270, 2270-2271, 2271-2272, 2272-2273, 2273-2274, 2274-2275, 2275-2276, 2276-2277, 2277-2278, 2278-2279, 2279-2280, 2280-2281, 2281-2282, 2282-2283, 2283-2284, 2284-2285, 2285-2286, 2286-2287, 2287-2288, 2288-2289, 2289-2290, 2290-2291, 2291-2292, 2292-2293, 2293-2294, 2294-2295, 2295-2296, 2296-2297, 2297-2298, 2298-2299, 2299-2300, 2300-2301, 2301-2302, 2302-2303, 2303-2304, 2304-2305, 2305-2306, 2306-2307, 2307-2308, 2308-2309, 2309-2310, 2310-2311, 2311-2312, 2312-2313, 2313-2314, 2314-2315, 2315-2316, 2316-2317, 2317-2318, 2318-2319, 2319-2320, 2320-2321, 2321-2322, 2322-2323, 2323-2324, 2324-2325, 2325-2326, 2326-2327, 2327-2328, 2328-2329, 2329-2330, 2330-2331, 2331-2332, 2332-2333, 2333-2334, 2334-2335, 2335-2336, 2336-2337, 2337-2338, 2338-2339, 2339-2340, 2340-2341, 2341-2342, 2342-2343, 2343-2344, 2344-2345, 2345-2346, 2346-2347, 2347-2348, 2348-2349, 2349-2350, 2350-2351, 2351-2352, 2352-2353, 2353-2354, 2354-2355, 2355-2356, 2356-2357, 2357-2358, 2358-2359, 2359-2360, 2360-2361, 2361-2362, 2362-2363, 2363-2364, 2364-2365, 2365-2366, 2366-2367, 2367-2368, 2368-2369, 23

On 10/10/68, the following information was received from the FBI, New York City, regarding the activities of the "Black Liberation Army" (BLA) in the New York City area:

The BLA is a group of individuals who are active in the New York City area. They are active in the area of civil rights and are active in the area of the Black Liberation Movement. They are active in the area of the Black Liberation Movement and are active in the area of the Black Liberation Movement.

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

[illegible]

1. The first step in the process of identifying a problem is to determine the nature of the problem. This involves a thorough understanding of the situation and the factors that are contributing to the problem. Once the nature of the problem is understood, the next step is to identify the causes of the problem. This involves a detailed analysis of the situation and the factors that are contributing to the problem. Once the causes of the problem are identified, the next step is to develop a plan of action. This involves determining the steps that need to be taken to solve the problem. Once a plan of action is developed, the next step is to implement the plan. This involves carrying out the steps that have been determined in the plan of action. Finally, the last step in the process is to evaluate the results of the plan. This involves determining whether the plan has been successful in solving the problem and whether any further action is needed.

[illegible]

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 932 318 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
21.06.2000 Bulletin 2000/25

(51) Int. Cl.⁷: **H04Q 7/38**

(43) Date of publication A2:
28.07.1999 Bulletin 1999/30

(21) Application number: 99101190.9

(22) Date of filing: 22.01.1999

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• De Benedittis, Rosella
20020 Barbaiana di Lainate (MI) (IT)
• Betti, Alessandro
62100 Macerata (IT)

(30) Priority: 26.01.1998 IT MI980129

(74) Representative: Giustini, Delio
c/o Italtel S.p.A.,
Cascina Castelletto
20019 Settimo Milanese (MI) (IT)

(71) Applicant: Italtel s.p.a.
20154 Milano (IT)

(54) Method for channel change in digital radiocommunication system

(57) Method for the change of a radio bearer in a digital telecommunication system comprising a radio-mobile unit (PP) and a fixed unit (RFP) connected between them on at least a bearer in the following, labeled with X. When a radio unit (PP or RFP) detects a bad connection quality on bearer X between said radio-mobile unit (PP) and fixed unit (RFP), the method applies with the execution in sequence of the following steps:

- listening of a new frequency on at least one of the time slots used in reception with the purpose to identify a second not interfered bearer, in the following, labelled with Y;
- sending from the requiring radio unit to the interacting radio unit a message requiring the activation of the said second bearer (Y);
- transferring of all communications between both radio units from the first bearer X to the second bearer Y as soon as the requiring radio unit receives a specific confirmation message by the interactive radio unit;
- return to the listening step if the confirmation message is not received.

The invention has the advantage of enabling the handover of a radio bearer changing only the frequency, but maintaining the same transceiving time slots without the need of an additional time slot which, in this way, is available for new communications.

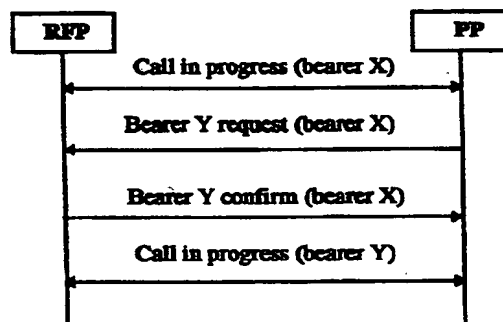


Fig. 5

EP 0 932 318 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 99 10 1190

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US 5 613 203 A (KUMAR VINOD - ET AL) 18 March 1997 (1997-03-18) * column 4, line 6 - line 40 *	1	H04Q7/38
A	EP 0 722 258 A (NOKIA MOBILE PHONES LTD) 17 July 1996 (1996-07-17) * column 1, line 10 - line 18 * * column 3, line 28 - column 7, line 17 *	1	
D, A	EP 0 576 079 A (KONINKL PHILIPS ELECTRONICS NV) 29 December 1993 (1993-12-29) * the whole document *	1	
A	BONZANO L ET AL: "DECT performance in the wireless PBX application" ICC '93 GENEVA. IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS '93. TECHNICAL PROGRAM, CONFERENCE RECORD (CAT. NO. 93CH3261-5); PROCEEDINGS OF ICC '93 - IEEE INTERNATIONAL CONFERENCE ON COMMUNICATIONS, GENEVA, SWITZERLAND, 23-26 MAY 1993, pages 1269-1273 vol. 2, XP002136277 1993, New York, NY, USA, IEEE, USA ISBN: 0-7803-0950-2 * page 1269, right-hand column, line 15 - page 1270, left-hand column, line 5 *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04Q
A	EP 0 749 256 A (NIPPON ELECTRIC CO) 18 December 1996 (1996-12-18) * abstract *	1	
E	EP 0 895 437 A (CANON KK) 3 February 1999 (1999-02-03) * column 13, line 14 - column 15, line 40 *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 April 2000	Examiner Baas, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P0401)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 10 1190

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-04-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5613203 A	18-03-1997	FR 2711867 A	05-05-1995
		AU 680545 B	31-07-1997
		AU 7588794 A	18-05-1995
		EP 0651587 A	03-05-1995
		FI 945040 A	29-04-1995
		NZ 264725 A	26-11-1996
EP 0722258 A	17-07-1996	GB 2297014 A	17-07-1996
		CA 2166831 A	11-07-1996
		JP 8251650 A	27-09-1996
		US 5825757 A	20-10-1998
EP 0576079 A	29-12-1993	DE 69324851 D	17-06-1999
		DE 69324851 T	25-11-1999
		ES 2133352 T	16-09-1999
		JP 6078360 A	18-03-1994
		SG 48384 A	17-04-1998
		US 5416778 A	16-05-1995
EP 0749256 A	18-12-1996	JP 2713240 B	16-02-1998
		JP 9009327 A	10-01-1997
		CN 1146699 A	02-04-1997
		SG 64390 A	27-04-1999
		US 5764631 A	09-06-1998
EP 0895437 A	03-02-1999	JP 11046174 A	16-02-1999
		CN 1220569 A	23-06-1999

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)